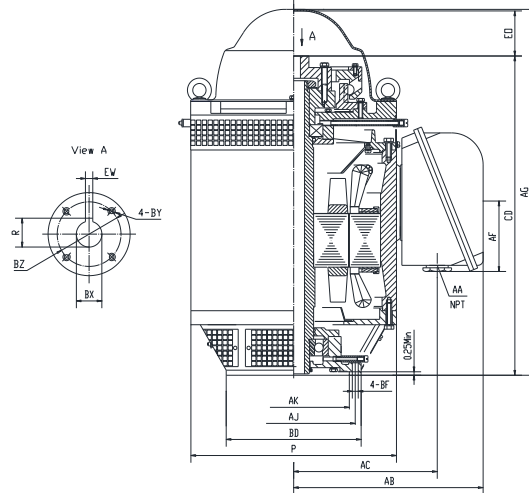




V1-30D4-W28610A

**VERTICAL HOLLOW SHAFT MOTOR
 NEMA PREMIUM EFFICIENCY
 INVERTER RATED 10:1 VT
 HIGH THRUST DESIGN
 THREE PHASE, OPEN DRIP PROOF (WP1) ENCLOSURE
 NON-REVERSE BALL TYPE RATCHET
 COUPLING INCLUDED**



DIMENSIONS

HP	RPM	Frame	MOUNTING DIMENSIONS													
			BD	AJ	AK	BF	BX	BZ	EW	R	BY	CD	E0 >	AC	AA	AF
30	1780	286TP	10	9.125	8.25	0.44	1	1.38	0.25	1.114	10-32	24.75	3.22	10.6	3	5.83

OVERALL DIMENSIONS			BEARINGS	
P	AB	AG	UPPER	LOWER
15.24	14.39	28.2	6212	7312B

COUPLING: Motor comes with a 1.0" coupling. You may select a different size coupling at no extra charge.

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease.

STEADY BUSHING: Motor is designed to accept a steady bushing. The bore size is 1 inches.



Electrical Helper.org

For All Your Electric Needs Since 1928
 411 N Platte Ave. York, NE. 68467

**AC-DC MOTORS :: SALES & SERVICE
 REWINDING :: CUSTOM CONTROL PANEL**

Kelly MacMillan
 Office Ph: 888-226-4917
 Fax: 888-226-4917
 Cell: 402-679-1579
 E-Mail: kelly@electricalhelper.com





V1-30D4-W28610A












**VERTICAL HOLLOW SHAFT MOTOR
 NEMA PREMIUM EFFICIENCY
 INVERTER RATED 10:1 VT
 HIGH THRUST DESIGN
 THREE PHASE, OPEN DRIP PROOF (WP1) ENCLOSURE
 NON-REVERSE BALL TYPE RATCHET
 COUPLING INCLUDED**

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient	Rating CONT
30	1780	286TP	230/460	60	1.15	F	B	1.15	H	WP1	23	40° C	S1

Amps (460V)		Efficiency (%)			Power Factor			Torque (ft-lb)			Down Thrust	Radial Ball Bearing	Angular Contact Bearing	Connection	Weight (lbs.)	
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %		UPPER	LOWER		
34.1	246	94.1	93.9	92.9	93.0	0.86	0.83	0.74	85	236	275	3200	6212	7312B	12 Lead 2Δ/Δ	572

NAME PLATE

 VERTICAL HOLLOW SHAFT HIGH THRUST DESIGN 						CONNECTION DIAGRAMS				
MODEL V1-30D4-W28610A						FRAME 286TP				
Hz	60	S.F.	1.15	ENCL	WP1	DESIGN	B			
HP	30	RPM	1780	INS	F	PHASE	3			
VOLTS	230/460	FLA	68.2/34.1	MAX.AMBIENT		40° C				
Enclosure	ODP	IP	23	RATING		CONTINUOUS				
NEMA CODE	H	P.F.	0.86	MOTOR WEIGHT		572	LBS.	PART WIND START CAPABLE @ 230V		
NOM EFF	94.1	MIN EFF	93.0	CONNECTION		12 Lead 2Δ/Δ				
DOWN THRUST		3200		BASE DIAMETER		10	INCHES			
UPPER BEARING		6212		LOWER BEARING		7312B				
LUBRICATION		MOBIL POLYREX EM		LUBRICATION		MOBIL POLYREX EM				
NON-REVERSE RATCHET - BALL TYPE		SERIAL NO.								
Specifically designed for use on deep well turbine pump applications. Hernando, Mississippi										
ROTATION										
MOTOR IS SUITABLE FOR INVERTER RATED 10:1 VT										

APPLICATIONS:

Specifically designed for use on deep well turbine pump applications. The coupling is equipped with a non-reverse ratchet, which prevents motor rotation from backspin at shutdown. These motors are built to NEMA standards and have special bearing arrangements to carry heavy thrust loads.

 **Electrical Helper.org**
 For All Your Electric Needs Since 1928
 411 N Platte Ave. York, NE. 68467

**AC-DC MOTORS :: SALES & SERVICE
 REWINDING :: CUSTOM CONTROL PANEL**

Kelly MacMillan
 Office Ph: 888-226-4917
 Fax: 888-226-4917
 Cell: 402-679-1579
 E-Mail: kelly@electricalhelper.com

