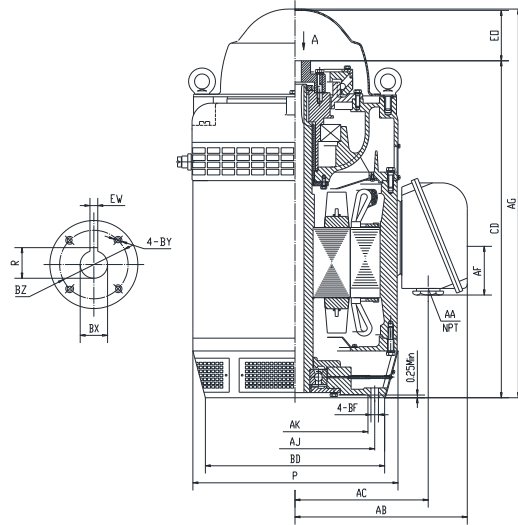




V2-125S4-W40516A-EHT

VERTICAL HOLLOW SHAFT MOTOR
NEMA PREMIUM EFFICIENCY
INVERTER DUTY 20:1 VT
INCLUDES INSULATED BEARING MOUNT - 40 HP AND ABOVE
EXTRA HIGH THRUST DESIGN
THREE PHASE, OPEN DRIP PROOF (WP1) ENCLOSURE
NON-REVERSE BALL TYPE RATCHET
COUPLING INCLUDED



DIMENSIONS

HP	RPM	Frame	MOUNTING DIMENSIONS													
			BD	AJ	AK	BF	BX	BZ	EW	R	BY	CD	E0 >	AC	AA	AF
125	1788	405TP	16.5	14.75	13.5	0.69	1-1/2	2.125	0.375	1.706	1/4-20	36.94	4.56	13.68	3	5.83

OVERALL DIMENSIONS			BEARINGS	
P	AB	AG	UPPER	LOWER
21	17.3	42.2	7230B/DT	6317

COUPLING: Motor comes with a 1.5" coupling. You may select a different size coupling at no extra charge.

BEARING LUBRICATION: The lower bearing comes lubricated with Mobil Polyrex EM Polyurea Grease.

OIL RESERVOIR: Motor is shipped without oil. The oil capacity is 4.5 quarts.

STEADY BUSHING: Motor is designed to accept a steady bushing. The bore size is 1-1/2 inches.



Electrical Helper.org

For All Your Electric Needs Since 1928
 411 N Platte Ave. York, NE. 68467

AC-DC MOTORS :: SALES & SERVICE
REWINDING :: CUSTOM CONTROL PANEL

Kelly MacMillan
 Office Ph: 888-226-4917
 Fax: 888-226-4917
 Cell: 402-679-1579
 E-Mail: kelly@electricalhelper.com





V2-125S4-W40516A-EHT











VERTICAL HOLLOW SHAFT MOTOR
NEMA PREMIUM EFFICIENCY
INVERTER DUTY 20:1 VT
INCLUDES INSULATED BEARING MOUNT - 40 HP AND ABOVE
EXTRA HIGH THRUST DESIGN
THREE PHASE, OPEN DRIP PROOF (WP1) ENCLOSURE
NON-REVERSE BALL TYPE RATCHET
COUPLING INCLUDED

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient	Rating CONT
125	1788	405TP	460	60	1.15	F	B	0.63	H	WP1	23	40° C	S1

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			Down Thrust	Angular Contact Bearing	Radial Ball Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %	13400	UPPER	LOWER	6 Lead Δ	1513
139	1015	95.4	95.4	94.7	94.5	0.88	0.87	0.84	362	242	255		7230B/DT	6317		

NAME PLATE

 VERTICAL HOLLOW SHAFT EXTRA HIGH THRUST DESIGN 										CONNECTION DIAGRAMS	
MODEL V2-125S4-W40516A-EHT					FRAME 405TP					PWS Start	
Hz	60	S.F.	1.15	ENCL	WP1	DESIGN	B				
HP	125	RPM	1788	INS	F	PHASE	3				
VOLTS	460	FLA	139	MAX.AMBIENT			40° C				
Enclosure	ODP	IP	23	RATING			CONTINUOUS				
NEMA CODE	H	P.F.	0.88	MOTOR WEIGHT			1513	LBS.	PART WIND START CAPABLE @ 230V		
NOM EFF	95.4	MIN EFF	94.5	CONNECTION			6 Lead Δ				
DOWN THRUST			13400		BASE DIAMETER			16.5	INCHES		
UPPER BEARING			7230B/DT (X 2) EHT		LOWER BEARING			6317			
OIL CAP. UPPER BEARING		4.5 QTS.		LUBRICATION			MOBIL POLYREX EM				
NON-REVERSE RATCHET - BALL TYPE				SERIAL NO.							
Specifically designed for use on deep well turbine pump applications. Hernando, Mississippi								CC326B			
		ROTATION									
MOTOR IS SUITABLE FOR INVERTER RATED 20:1 VT											

APPLICATIONS:

Specifically designed for use on deep well turbine pump applications. The coupling is equipped with a non-reverse ratchet, which prevents motor rotation from backspin at shutdown. These motors are built to NEMA standards and have special bearing arrangements to carry heavy thrust loads.



Electrical Helper.org

For All Your Electric Needs Since 1928
 411 N Platte Ave. York, NE. 68467

AC-DC MOTORS :: SALES & SERVICE
REWINDING :: CUSTOM CONTROL PANEL

Kelly MacMillan
 Office Ph: 888-226-4917
 Fax: 888-226-4917
 Cell: 402-679-1579
 E-Mail: kelly@electricalhelper.com

