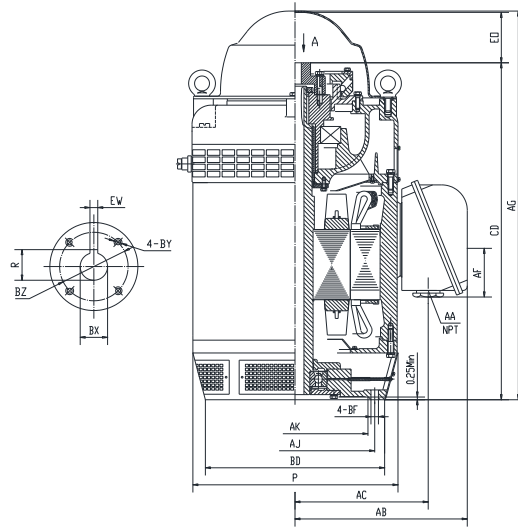




V2-50D4-W32616B

VERTICAL HOLLOW SHAFT MOTOR
 NEMA PREMIUM EFFICIENCY
 INVERTER DUTY 20:1 VT
 INCLUDES INSULATED BEARING MOUNT - 40 HP AND ABOVE
 HIGH THRUST DESIGN
 THREE PHASE, OPEN DRIP PROOF (WP1) ENCLOSURE
 NON-REVERSE BALL TYPE RATCHET
 COUPLING INCLUDED



DIMENSIONS

HP	RPM	Frame	MOUNTING DIMENSIONS													
			BD	AJ	AK	BF	BX	BZ	EW	R	BY	CD	E0 >	AC	AA	AF
50	1785	326TP	16.5	14.75	13.5	0.69	1-3/16	1.75	0.25	1.304	1/4-20	28.22	4.22	11.65	3	5.83

OVERALL DIMENSIONS			BEARINGS	
P	AB	AG	UPPER	LOWER
17.32	15.44	32.7	7221B	6213

COUPLING: Motor comes with a 1.188" coupling. You may select a different size coupling at no extra charge.

BEARING LUBRICATION: The lower bearing comes lubricated with Mobil Polyrex EM Polyurea Grease.

OIL RESERVOIR: Motor is shipped without oil. The oil capacity is 1.75 quarts.

STEADY BUSHING: Motor is designed to accept a steady bushing. The bore size is 1-3/16 inches.



Electrical Helper.org

For All Your Electric Needs Since 1928
 411 N Platte Ave. York, NE. 68467



**AC-DC MOTORS :: SALES & SERVICE
 REWINDING :: CUSTOM CONTROL PANEL**

Kelly MacMillan
 Office Ph: 888-226-4917
 Fax: 888-226-4917
 Cell: 402-679-1579
 E-Mail: kelly@electricalhelper.com





Electrical Helper.org
 For All Your Electric Needs Since 1928
 411 N Platte Ave. York, NE. 68467

V2-50D4-W32616B

VERTICAL HOLLOW SHAFT MOTOR
NEMA PREMIUM EFFICIENCY
INVERTER DUTY 20:1 VT
INCLUDES INSULATED BEARING MOUNT - 40 HP AND ABOVE
HIGH THRUST DESIGN
THREE PHASE, OPEN DRIP PROOF (WP1) ENCLOSURE
NON-REVERSE BALL TYPE RATCHET
COUPLING INCLUDED

AC-DC MOTORS :: SALES & SERVICE
REWINDING :: CUSTOM CONTROL PANEL

Kelly MacMillan
 Office Ph: 888-226-4917
 Fax: 888-226-4917
 Cell: 402-679-1579
 E-Mail: kelly@electricalhelper.com











PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient	Rating CONT
50	1785	326TP	230/460	60	1.15	F	B	0.83	H	WP1	23	40° C	S1

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			Down Thrust	Angular Contact Bearing	Radial Ball Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %	5500	UPPER	LOWER	12 Lead 2Δ/Δ	811
56.4	445	94.5	94.2	93.0	93.6	0.87	0.84	0.76	145	235	270		7221B	6213		

NAME PLATE

 VERTICAL HOLLOW SHAFT HIGH THRUST DESIGN 							CONNECTION DIAGRAMS		
MODEL V2-50D4-W32616B				FRAME 326TP			230V 		
Hz 60	S.F. 1.15	ENCL WP1	DESIGN B						
HP 50	RPM 1785	INS F	PHASE 3				460V 		
VOLTS 230/460	FLA 112.8/56.4	MAX.AMBIENT 40° C							
Enclosure ODP	IP 23	RATING CONTINUOUS							
NEMA CODE H	P.F. 0.87	MOTOR WEIGHT 811 LBS.							
NOM EFF 94.5	MIN EFF 93.6	CONNECTION 12 Lead 2Δ/Δ							
DOWN THRUST 5500		BASE DIAMETER 16.5 INCHES							
UPPER BEARING 7221B		LOWER BEARING 6213							
OIL CAP. UPPER BEARING 1.75 QTS.		LUBRICATION MOBIL POLYREX EM							
NON-REVERSE RATCHET - BALL TYPE		SERIAL NO.							
Specifically designed for use on deep well turbine pump applications. Hernando, Mississippi		  		CC326B		PART WIND START CAPABLE @ 230V			
ROTATION 									
MOTOR IS SUITABLE FOR INVERTER RATED 20:1 VT									

APPLICATIONS:

Specifically designed for use on deep well turbine pump applications. The coupling is equipped with a non-reverse ratchet, which prevents motor rotation from backspin at shutdown. These motors are built to NEMA standards and have special bearing arrangements to carry heavy thrust loads.